



HUNTER - LOW PROFILE III- CEILING FAN INSTALLATION GUIDE

What to Expect with Your Installation

Must be able to secure the fan to building structure or fan-rated outlet box

If you are unfamiliar with wiring, use a qualified electrician.

Know your wiring

Assess location

You may need a friend to help you.

Check box to see fan weight

www.HunterFan.com 1.888.830.1326

Read and Save These Instructions

This product conforms to UL Standard 507.

⚠ WARNINGS

w.1 - To reduce the risk of fire, electrical shock, or personal injury, mount fan directly from building structure and/or an outlet box marked acceptable for fan support of 70 lbs (31.8 kg) and use the mounting screws provided with the outlet box.

w.2 - To avoid possible electrical shock, before installing or servicing your fan, disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location. If you cannot lock the circuit breakers in the off position, securely fasten a prominent warning device, such as a tag, to the service panel.

w.3 - To reduce the risk of fire, electrical shock, or motor damage, use only Hunter Solid State Speed Controls.

w.4 - To reduce the risk of personal injury, do not bend the blade brackets when installing the blade brackets, balancing the blades, or cleaning the fan. Do not insert foreign objects in between rotating fan blades.

⚠ CAUTIONS

c.1 - All wiring must be in accordance with national and local electrical codes ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.

c.2 - Use only Hunter replacement parts.

2

M3516-01 • 02/10/16 • © Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad








HUNTER - LOW PROFILE III- CEILING FAN INSTALLATION GUIDE


Tools Needed

www.HunterFan.com 1.888.830.1326


☒ Ladder


☒ Screwdrivers


☐ Power Drill (optional)


☐ 9/64" Drill Bit (optional)

If mounting to a support structure, you will also need these tools.

3

M3516-01 • 02/10/16 • © Hunter Fan Company




#2 Chootoo Road, South Aranguez, San Juan, Trinidad







HUNTER - LOW PROFILE III- CEILING FAN INSTALLATION GUIDE

Ceiling Bracketwww.HunterFan.com 1.888.830.1326




Turn Power
OFF



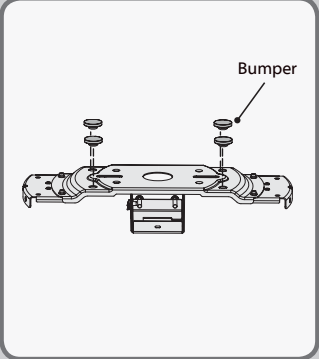


Bumper

Make sure all four (4) bumpers are still attached.



Use wood screws
(included) when securing to support structure with approved electrical outlet box. Drill 9/64" pilot holes in support structure to aid in securing ceiling bracket with hardware found in the ★ hardware bag.

Use machine screws
(provided with outlet box) when securing to existing ceiling fan-rated outlet box. Make sure it is securely installed and is acceptable for fan support of 31.8 kg (70 lbs) or less.



To avoid possible electrical shock, before installing your fan, disconnect the power by turning off the circuit breakers to the outlet box associated with the wall switch location.

4

Refer to warning w.1 on pg. 2

M3516-01 • 02/10/16 • © Hunter Fan Company




#2 Chootoo Road, South Aranguez, San Juan, Trinidad






HUNTER - LOW PROFILE III- CEILING FAN INSTALLATION GUIDE


Ceiling Bracket (continued)

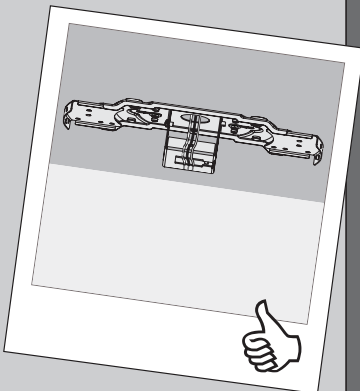A line drawing of the ceiling bracket assembly, showing a horizontal bar with mounting brackets at each end. A hand icon is shown pointing to the bottom right corner of the illustration.

Preparation

A line drawing of a clock face in the top left corner and a ceiling with a hole in the center. A dashed line indicates the path of a screw being inserted into the hole.

Time Saver Tip: Get a helper to insert grommets, found in the ■ hardware bag, into the blades while you're doing the next couple of steps.

The Hunter Fan Company logo, which is a stylized 'H' inside a square.

M3516-01 • 02/10/16 • © Hunter Fan Company

www.HunterFan.com 1.888.830.1326



#2 Chootoo Road, South Aranguéz, San Juan, Trinidad






HUNTER - LOW PROFILE III- CEILING FAN INSTALLATION GUIDE


Hanging the Fan

www.HunterFan.com 1.888.830.1326

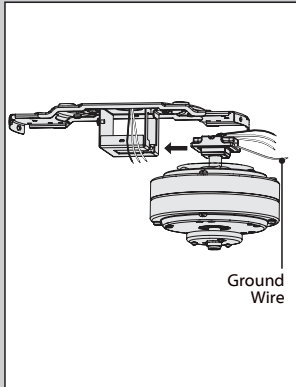


Ground Wire

While holding the wires out of the way, lift the motor assembly and place the square hanger into the opening in the ceiling bracket. Be sure the ground wire attached to the hanger faces out of the large opening in the ceiling bracket.

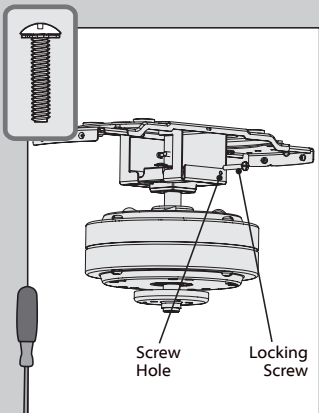

Screw Hole Locking Screw

Once the motor is in the ceiling bracket, use the two locking screws found in the ★ hardware bag to secure the motor to the ceiling bracket.

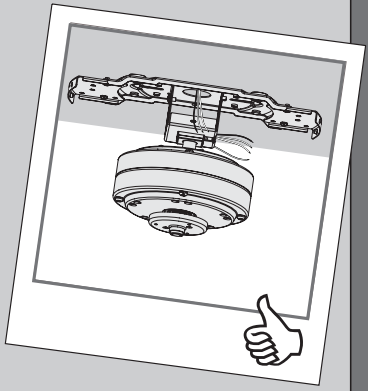

Note: Fan style may vary.

6

M3516-01 • 02/10/16 • © Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad

