



# CANARM - TAY - OUTDOOR LIGHTING INSTALLATION GUIDE



## EASY CONNECT® INSTALLATION INSTRUCTIONS

EO -4  
11/14

QUESTIONS OR CONCERNS CONTACT CANARM AT:  
1-800-265-1833 (English) • 1-800-567-2513 (French)  
Monday through Friday 8:00 AM to 5:00 PM E.S.T.

INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS  
READ ALL INSTRUCTIONS

### IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS


### SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


NOTE: Product May Not Look Exactly As Shown In Figures.

### INSTALL EASY CONNECT MOUNTING BRACKET:

#### STEP 1




Attach easy connect mounting bracket to electrical box with electrical box screws (not included).

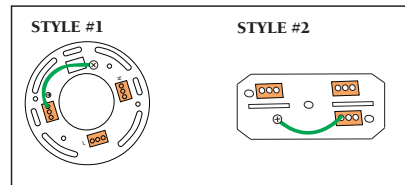


### CONNECT HOUSE WIRES

#### STEP 2 - Option 1



Connect (push) electrical wires from electric box (house wiring) into correct inserts. Black (Live), White (Neutral), Green (Ground)


### Option 2 - MULTIPLE ELECTRICAL BOX WIRES



For multiple black (live) & white (neutral) wires joined in the electrical box (house wiring), attach a single "black" and "white" Jumper Wire before connecting. Strip 7mm from a 6" Jumper Wires (AWG 12-24) supplied. Then connect (push) wires into correct inserts.


### CONNECT LIGHT FIXTURE

#### STEP 3




Connect (push) electrical wires from fixture into correct inserts. Black (live), White (neutral), Green (ground)

#### STEP 4




Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).  
**Note:** If required, assemble body and spread the arms of the fixture out evenly.

#### STEP 5

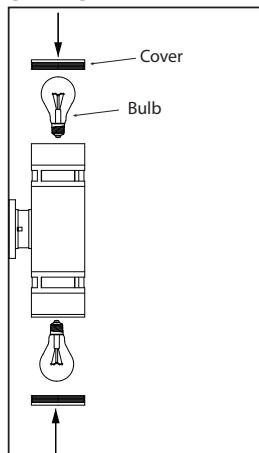

Install specified bulb type and wattage (not included). Push covers onto the fixture.

#### STEP 6

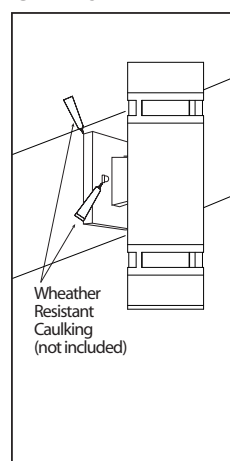

After Installation, seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulk. The bottom should be left un-caulked to prevent moisture build-up. Apply a small amount of weather resistant caulk around the side perimeter between the cap nut and mounting plate.

Imported By: CANARM LTD., 2157 Parkedale Ave., Brockville, Ontario, K6V 5V6, Tel: (613) 342-5424, Fax: (800) 263-4598



#2 Chootoo Road, South Aranguez, San Juan, Trinidad

