




HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

What to Expect with Your Installation




☒ Must be able to secure the fan to building structure or fan-rated outlet box

If you are unfamiliar with wiring, use a qualified electrician.



☒ Know your wiring



☒ Assess location

You may need a friend to help you.



☒ Check box to see fan weight



Ceiling angles greater than 34° will require an Angled Mounting Kit. See page 4 for details.

☒ Assess ceiling angle

1 Standard Downrod
for ceilings 8-10 feet high

2 Shorter Downrod
for fans installed close to ceiling

3 Longer Downrod
for ceilings 10 feet or higher

☒ Select a downrod length

www.HunterFan.com 1.888.830.1326

Read and Save These Instructions
This product conforms to UL Standard 507.

⚠ WARNINGS

- w.1 - To reduce the risk of fire, electrical shock, or personal injury, mount fan directly from building structure and/or an outlet box marked acceptable for fan support of 70 lbs (31.8 kg) and use the mounting screws provided with the outlet box.
- w.2 - To avoid possible electrical shock, before installing or servicing your fan, disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location. If you cannot lock the circuit breakers in the off position, securely fasten a prominent warning device, such as a tag, to the service panel.
- w.3 - To reduce the risk of fire, electrical shock, or motor damage, use only Hunter Solid State Speed Controls.
- w.4 - To reduce the risk of personal injury, do not bend the blade brackets when installing the blade brackets, balancing the blades, or cleaning the fan. Do not insert foreign objects in between rotating fan blades.

⚠ CAUTIONS

- c.1 - All wiring must be in accordance with national and local electrical codes ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.
 - c.2 - Use only Hunter replacement parts.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:*
- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- Caution: modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.*
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*



M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad








HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE


Tools Needed


www.HunterFan.com 1.888.830.1326


☒ Ladder


☒ Pliers

☒ Wire Strippers

☒ Screwdrivers

☐ Power Drill (optional)

☐ 9/64" Drill Bit (optional)



Do not discard the hardware bags or mix parts from different bags. Make note of the symbol printed on each hardware bag. The symbols can be used to identify the appropriate hardware for each step.

If mounting to a support structure, you will also need these tools.

3

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad





HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

34° CEILING

If you have a flat ceiling:
Hang your fan by a standard downrod (included).

If you have an angled ceiling:
1. You will need a longer downrod (sold separately).
2. If your ceiling angle is greater than 34°, you will also need an Angled Mounting Kit (sold separately).

Use the three steps below to determine if your ceiling angle is greater than 34°

1

FOLD
on dotted line

2

PLACE
against wall

3

SLIDE
toward ceiling

SITUATION 1

Guide Touches **BOTH** Ceiling & Wall
You need **ONLY** a Longer Downrod
**most common*

SITUATION 2

Guide Touches Wall but **NOT** Ceiling
You need **BOTH** a Longer Downrod & an Angled Mounting Kit

Mounting Options www.HunterFan.com 1.888.830.1326

Standard Mounting Style

Use **Standard Mounting** or **Low-Profile Mounting** to hang the fan from a flat ceiling.

Angled Mounting Style

Use **Angled Mounting** to hang the fan from a vaulted or angled ceiling.

4

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

Ceiling Bracket

www.HunterFan.com 1.888.830.1326

Turn Power
OFF

Make sure all four bumpers are still attached.

For angled ceilings, point opening toward peak.

If you are unable to do this, call Technical Support at 1-888-830-1326.

Use wood screws (included) when securing to support structure with approved electrical outlet box. Drill 9/64" pilot holes in support structure to aid in securing ceiling bracket with hardware found in the ★ hardware bag.

Use machine screws (provided with outlet box) when securing to existing ceiling fan-rated outlet box. Make sure it is securely installed and is acceptable for fan support of 31.8 kg (70 lbs) or less.

Refer to warning w.1 on pg. 2

5

To avoid possible electrical shock, before installing your fan, disconnect the power by turning off the circuit breakers to the outlet box associated with the wall switch location.

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad





HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

Downrod

www.HunterFan.com 1.888.830.1326

Option 1
Standard Downrod
for ceilings 8-10' high
Included (pre-assembled)

Option 2
Shorter Downrod
for fans installed close to ceiling
Sold Separately

Option 3
Longer Downrod
for angled ceilings or ceilings 10' or higher
Sold Separately

skip to next page

If you need a different downrod length follow these steps:

Steps 1-5 to remove standard downrod pipe

Steps 6-10 to reassemble with new pipe

6

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad





HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

Downrod (continued) www.HunterFan.com 1.888.830.1326

Remove the pre-installed setscrew so that the downrod can be inserted.

Hand tighten the downrod (at least 4-5 full turns) until it stops.

The wires can be cut, but leave at least 8" extending from the top of the downrod.

Tighten the setscrew with pliers. **DO NOT HAND TIGHTEN.**

If the setscrew is not tightened securely, the fan may fall.

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad







HUNTER - SYMPHONY - CEILING FAN INSTALLATION GUIDE

Downrod (continued)


www.HunterFan.com 1.888.830.1326

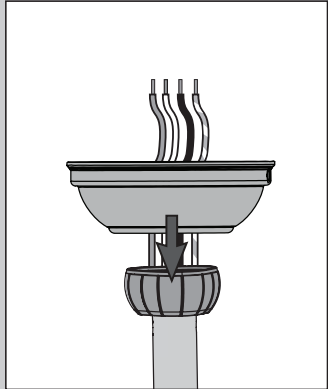

Put the wires and downrod through the canopy. Let the canopy sit loosely on top of the fan.

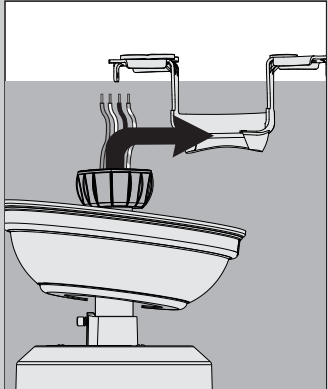

DO NOT PICK THE FAN UP BY THE CANOPY OR WIRES. Place the downrod ball into the slot in the ceiling bracket.

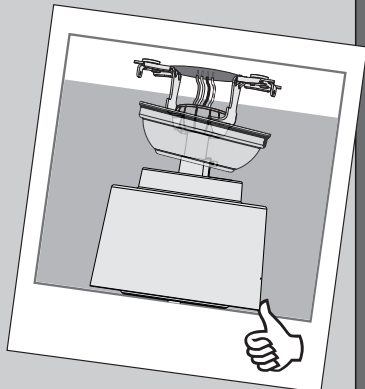

WARNING: This receiver cannot be installed in conjunction with any other receiver or hard-wired wall control. Doing so will void your warranty.

8

M3602-01 • 09/01/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad

