



# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

## Table of Contents


www.HunterFan.com 1.888.830.1326

Congratulations on purchasing your new Hunter® ceiling fan! It will provide comfort and performance in your home or office for many years. This installation and operation manual contains complete instructions for installing and operating your fan.

We are proud of our work and appreciate the opportunity to supply you with the best ceiling fan available anywhere in the world.

To register your fan, please visit:  
[www.HunterFan.com/register](http://www.HunterFan.com/register)  
Save your receipt for proof of purchase.


### What to Expect with Your Installation




### Tools Needed




### Mounting Options




### Ceiling Bracket




### Downrod




### Wiring




### Canopy




### Blades




### Switch Housing




### Light Kit




### Remote Control



### Operation, Maintenance & Cleaning



### Troubleshooting



1

M0114-01 • 02/10/16 • © 2016 Hunter Fan Company




#2 Chootoo Road, South Aranguez, San Juan, Trinidad






# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

## What to Expect with Your Installation




☒ Must be able to secure the fan to building structure or fan-rated outlet box

If you are unfamiliar with wiring, use a qualified electrician.



☒ Know your wiring



☒ Assess location

You may need a friend to help you.



☒ Check box to see fan weight



Ceiling angles greater than 34° will require an Angled Mounting Kit. See page 4 for details.

☒ Assess ceiling angle

**1 Standard Downrod**  
for ceilings 8-10 feet high

**2 Shorter Downrod**  
for fans installed close to ceiling

**3 Longer Downrod**  
for ceilings 10 feet or higher

☒ Select a downrod length

www.HunterFan.com 1.888.830.1326

## Read and Save These Instructions

This product conforms to UL Standard 507.

### ⚠ WARNINGS

- w.1 - To reduce the risk of fire, electrical shock, or personal injury, mount fan directly from building structure and/or an outlet box marked acceptable for fan support of 70 lbs (31.8 kg) and use the mounting screws provided with the outlet box.
- w.2 - To avoid possible electrical shock, before installing or servicing your fan, disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location. If you cannot lock the circuit breakers in the off position, securely fasten a prominent warning device, such as a tag, to the service panel.
- w.3 - To reduce the risk of fire, electrical shock, or motor damage, use only Hunter Solid State Speed Controls.
- w.4 - To reduce the risk of personal injury, do not bend the blade brackets when installing the blade brackets, balancing the blades, or cleaning the fan. Do not insert foreign objects in between rotating fan blades.

### ⚠ CAUTIONS

- c.1 - All wiring must be in accordance with national and local electrical codes ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.
- c.2 - Use only Hunter replacement parts.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:*
- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- Caution: modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.*
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

2

M0114-01 • 02/10/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad








# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE


**Tools Needed**


[www.HunterFan.com](http://www.HunterFan.com) 1.888.830.1326


  
☒ Ladder

  
☒ Pliers

  
☒ Wire Strippers

  
☒ Screwdrivers

  
☐ Power Drill (optional)

  
☐ 9/64" Drill Bit (optional)

If mounting to a support structure, you will also need these tools.

3

M0114-01 • 02/10/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad





# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

**34°**

**If you have a flat ceiling:**  
Hang your fan by a standard downrod (included).

**If you have an angled ceiling:**  
1. You will need a longer downrod (sold separately).  
2. If your ceiling angle is greater than 34°, you will also need an Angled Mounting Kit (sold separately).

Use the three steps below to determine if your ceiling angle is greater than 34°:

1

**FOLD**  
on dashed line

2

**PLACE**  
against it and

3

**SLIDE**  
toward ceiling

**SITUATION 1**

Guide Touches BOTH Ceiling & Wall  
You need **ONLY** a Longer Downrod

**SITUATION 2**

Guide Touches Wall but **NOT** Ceiling  
You need **BOTH** a Longer Downrod & an Angled Mounting Kit

**Mounting Options**

www.HunterFan.com 1.888.888.1238

Standard Mounting Style

Use Standard Mounting or Low-Profile Mounting to hang the fan from a flat ceiling.

Angled Mounting Style

Use Angled Mounting to hang the fan from a vaulted or angled ceiling.

4

©2014-2015 Hunter Fan Company



# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

**Ceiling Bracket**

[www.HunterFan.com](http://www.HunterFan.com)
1-888-888-1238

**Turn Power OFF**

Use wood screws (included) when securing to support structure with approved electrical outlet box. Drill 9/64" pilot holes in support structure to aid in securing ceiling bracket with hardware found in the hardware bag.

Use machine screws (provided with outlet box) when securing to existing ceiling fan-rated outlet box. Make sure it is securely installed and is acceptable for fan support of 21.8 kg (70 lbs) or less.

For angled ceilings, point opening toward peak.

Make sure all four bumpers are still attached.

If you are unable to do this, call Technical Support at 1-888-888-1238.

To avoid possible electrical shock, before installing your fan, disconnect the power by turning off the circuit breaker to the outlet box associated with the wall switch location.


Refer to wiring w/1 on pg. 2

5

©2014-2015 82702187-0 2015 Hunter Fan Company



## HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

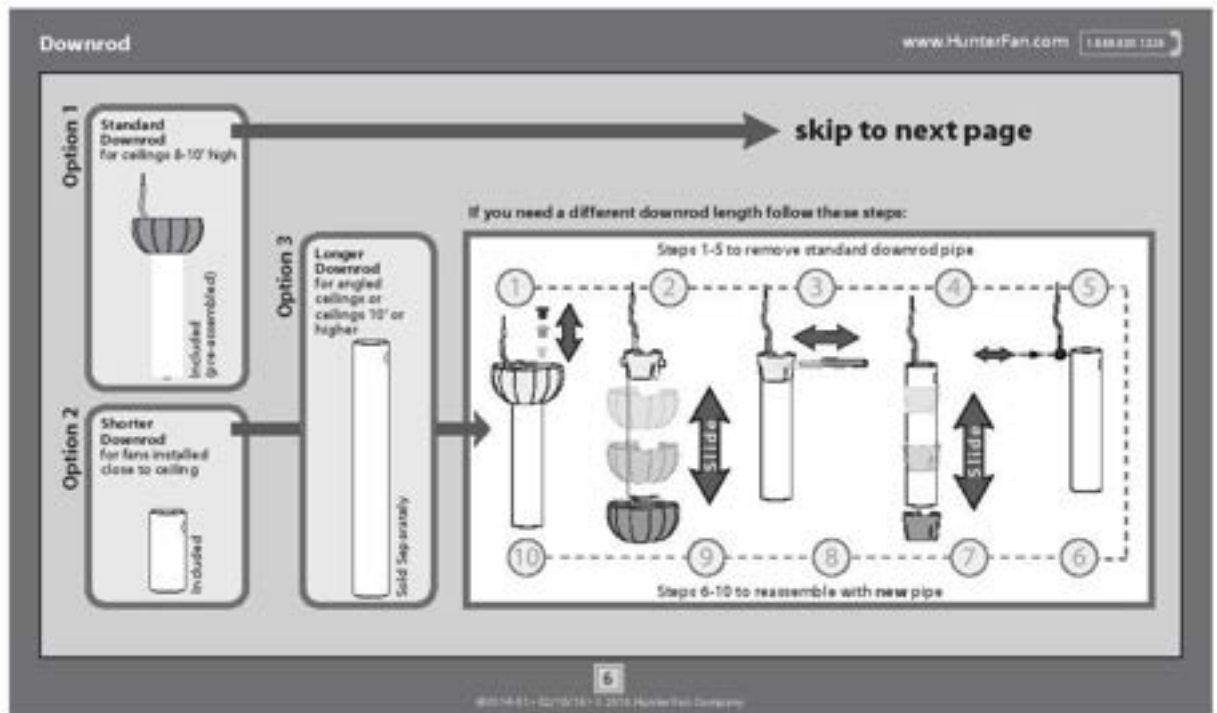





# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

Downrod (continued)

www.HunterFan.com 1.888.830.1326

Remove the pre-installed setscrew so that the downrod can be inserted.

Hand tighten the downrod (at least 4-5 full turns) until it stops.

The wires can be cut, but leave at least 8" extending from the top of the downrod.

Tighten the setscrew with pliers. **DO NOT HAND TIGHTEN.**

If the setscrew is not tightened securely, the fan may fall.

7

M0114-01 • 02/10/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguez, San Juan, Trinidad







# HUNTER - DEMPSEY - CEILING FAN INSTALLATION GUIDE

## Downrod (continued)


www.HunterFan.com 1.888.830.1326

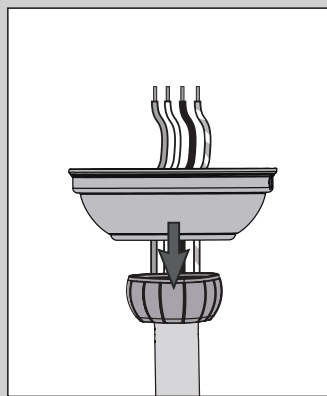

Put the wires and downrod through the canopy. Let the canopy sit loosely on top of the fan.

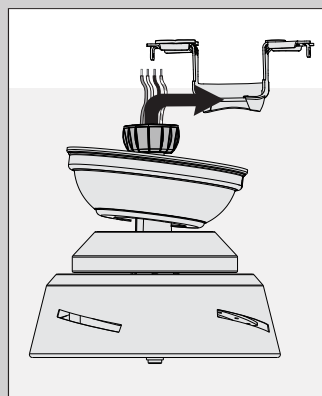

**DO NOT PICK THE FAN UP BY THE CANOPY OR WIRES.** Place the downrod ball into the slot in the ceiling bracket.

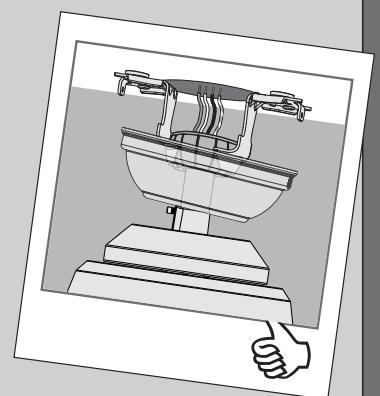

8

M0114-01 • 02/10/16 • © 2016 Hunter Fan Company



#2 Chootoo Road, South Aranguéz, San Juan, Trinidad

