




# BROAN - B58 SERIES - RANGE HOODS SPECIFICATION SHEET

## BROAN®

### SPECIFICATION SHEET

## B58 SERIES RANGE HOOD



Timeless design that has become the icon of European style.

#### FEATURES

- Wall mount
- Finish: 430 Stainless Steel no. 4 Brushed
- Widths: 29-1/2", 35-7/16" (35-7/16" width not available in Canada)
- Telescopic flue accommodates 8' to 9' ceilings
- 6" round duct connector/backdraft damper
- Convertible to non-ducted operation (requires Model No. RK58 sold separately)
- Halogen lighting (2 Type JC, 12V, 20W, G-4 Base - bulbs included)
- 5 push-button controls: blower on-off, blower low speed, blower medium speed, blower high speed, light on-off
- Single centrifugal blower
- Dishwasher-safe filters feature a quick-release latch
- Cord-connected

#### OPTIONS


- Flue extension for 10' ceiling (Model No. FXN58SS) (27-3/4" long) (ducted or non-ducted)
- Replacement non-ducted recirculating filter (Model No. ROUNDFILTER)
- Replacement grease filters available

#### SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	3.3	450 (high) 200 (low)	8.5 (high) 2.5 (low)	6" round



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

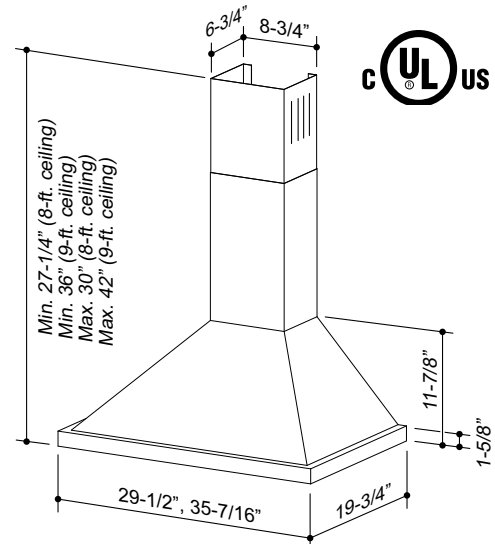

Mount range hood so bottom of hood is 30" minimum above cooking surface.

Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711  
Venmar Ventilation ULC Drummondville, Québec www.broan.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

Specifications subject to change without notice.

91J

99044485D



#2 Chootoo Road, South Aranguez, San Juan, Trinidad

